


Features:

- Provide 120° beam angles.
- Easy Installation:
- Low Power Consumption: Less than 400 Watts.
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
 - Aluminium Lamp Shell.
- Operating temperature: -25°C~+45°C.
- 100-277V AC input.
- LED Type : 2835 LED /952PCS.
- Full spectrum.
- Not dimmable.

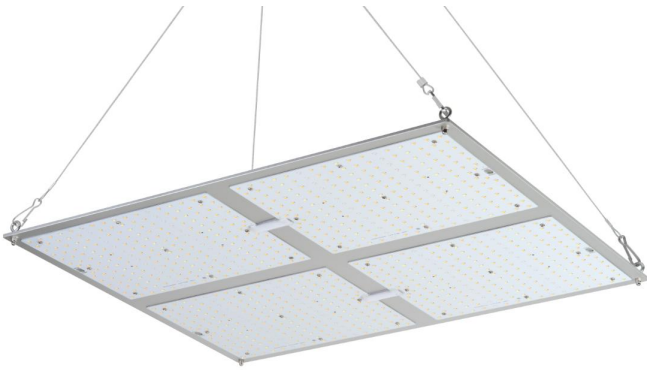

Benefits:

- Energy Cost Savings:
 - Over 60% Compared to Incandescent.
- Solid-State:
 - High-Shock & High-Vibration Resistant,
 - Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:
 - No Mercury, No Lead Content
- No Hazardous Emissions:
 - No UV or IR Radiation
- Constant Light Output:
 - Even Lighting, Non-Halation

Applications:


- For hemp plants Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium
Input Voltage	100-277V AC
Wattage	400W
PPFD	Height:24" /0.6m, 465 μ mol/(m • s)
	Height:36" /0.8m, 295 μ mol/(m • s)
PPF	660.4 μ mol/s
Light Efficiency	149.6lm/W
PPF Efficiency	2.32 μ mol/S /W (\pm 0.3)
Spectrum	Full spectrum
Power Factor	PF \geq 0.9
Operating frequency	50-60Hz
Operating Temperature	-25°C ~ +45°C
Storage Temperature	-30°C ~ +60°C
Net Weight per piece (Kg)	5.6KG
Certifications	CE Certification;RoHS Compliant
Size	600*480*55mm


Product Selection Guide:

Part No.	Beam Angle	Total Lumens	CCT/ wavelength	Color
PG-W400WCF	120°	--	661nm	Full spectrum

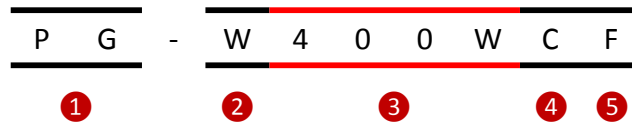

①	PG:	Product Type.
②	W:	W-Full spectrum
③	400W:	The LED power is 400W
④	C:	AC100-277V
⑤	F:	Shell type


Product Dimensions:

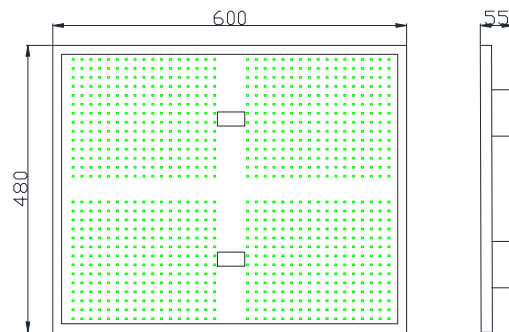

Notes:

1. All dimensions unit in mm
2. Tolerances are ± 5 mm unless otherwise noted.

Package Dimension:

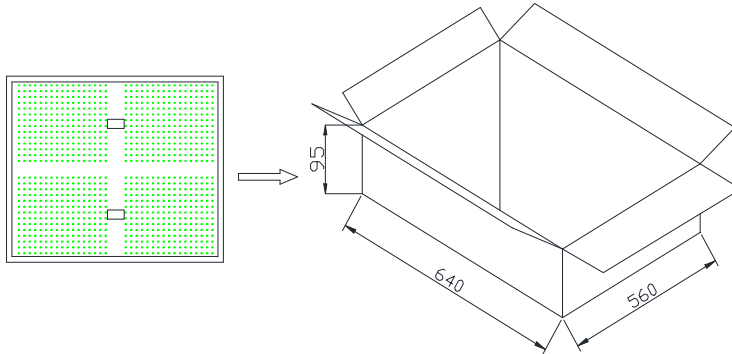

Medium carton
640L*560W*95Hmm
25.2"L*22.05"W*3.74"H
1pcs LED Products inside

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- One led driver is for 4 bars, can not light up two bars with one driver.
- For vision safety, do not look at the light directly when it is operational.
- Before use the grow bar, please kindly tear the clear film on the surface of the PC.