



Features:

- No UV or IR light radiation.
 - Provide 180° beam angles.
 - Easy Installation: Using Existing E27 Base Fixture.
 - Low Power Consumption: Less than 5 Watts.
 - Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
- UV Stabilized PC Lampshade And Aluminium alloy Lamp Shell.
 - High CRI: 70-85.
 - Correlated Color Temperature:2700-6500K.
 - Operating temperature: -20°C~+60°C.
 - 100-240V AC input.
 - LED bulb works with Alexa, Amazon Echo.

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Applications:


- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Specifications:

| | |
|---------------------------|-----------------|
| Lamp Shell | Aluminium Alloy |
| Input Voltage | 100-240V AC |
| Base Type | E27 Base |
| Wattage | 5W |
| Power Factor | PF \geq 0.6 |
| Operating frequency | 50-60Hz |
| Operating Temperature | -20°C ~ +60°C |
| Storage Temperature | -30°C ~ +70°C |
| Net Weight per piece (Kg) | -- |
| Certifications | RoHS Compliant |
| Size | Ø65*115mm |

Product Selection Guide:

| Part No. | Beam Angle | Total Lumens | CCT | Color | CRI |
|-----------------|------------|--------------|---------------------------|----------------------|-----------|
| GL-BT2835WWW30C | 180° | 150±10% | 2700-3500K /5500-6500K | Warm White /White | \geq 70 |

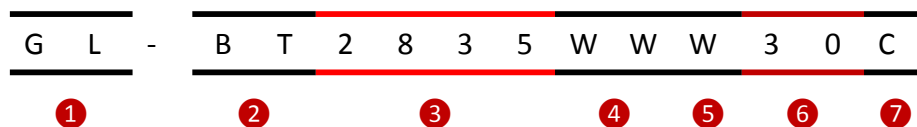

LED Bulb Light Lamp Series


Data Sheet

GL-BT2835WW30C

AC100-240V, 5W, LED Bulbs

| | | |
|---|-------|----------------|
| ① | GL: | Bulb Light |
| ② | BT: | Bulb Type |
| ③ | 2835: | LED Type |
| ④ | WW: | WW- Warm White |
| ⑤ | W: | W-White |
| ⑥ | 30: | 30 pcs of LEDs |
| ⑦ | C: | AC100-240V |

Product Dimensions:

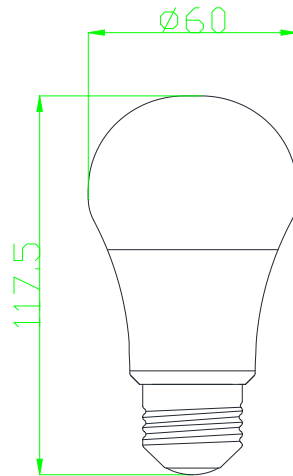

Notes:

1. All dimensions unit in mm
2. Tolerances are ± 1 mm unless otherwise noted.

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.