



Features:

- No UV or IR light radiation.
- Provide 180° beam angles.
- Easy Installation: Using Existing E26 Base Fixture
- Low Power Consumption: Less than 12 Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
 - UV Stabilized PC Lampshade And Aluminium alloy Lamp Shell.
 - High CRI: 70-85
 - Correlated Color Temperature: 2700-6500K
 - Operating temperature: -20°C~+60°C
- 110V AC input
- LED Type: 5730 LED

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Applications:


- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium Alloy
Input Voltage	110V AC
Base Type	E26 Base
Wattage	12W
Power Factor	PF \geq 0.6
Operating frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Net Weight per piece (Kg)	0.15Kg
Certifications	RoHS Compliant
Size	Ø75*130mm

Product Selection Guide:

Part No.	Beam Angle	Total Lumens	CCT	Color	CRI
GL-E26WW24C	180°	900±5%	2700-3500K	Warm White	\geq 80
GL-E26W24C	180°	1000±5%	6000-6500K	White	\geq 70

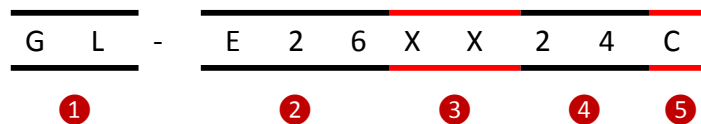

LED Bulb Light Lamp Series


Data Sheet

GL-E26XX24C

AC110V, 12W, LED Bulbs

①	GL:	Bulb Light
②	E26:	E26 base
③	XX:	W-White WW- Warm White
④	24:	24 pcs of LEDs
⑤	C:	AC110V



Product Dimensions:

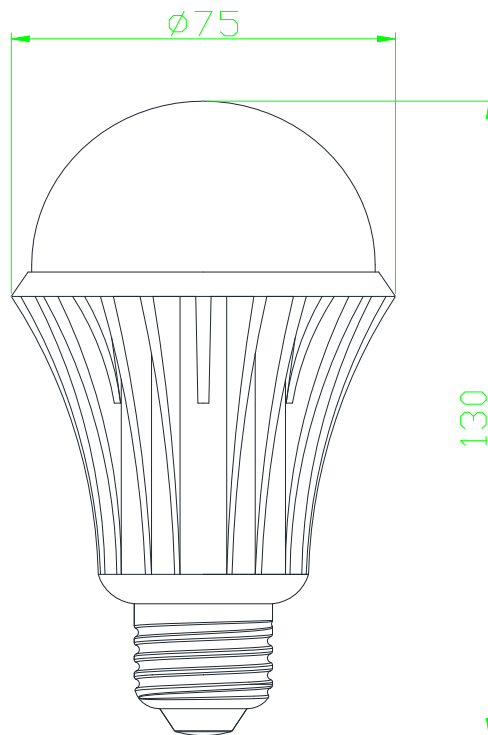


Notes:

1. All dimensions unit in mm
2. Tolerances are $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension:



Small carton
120L*180W*75Hmm
(4.73"L*7.09"W*2.96"H)
1pcs LED Bulb inside

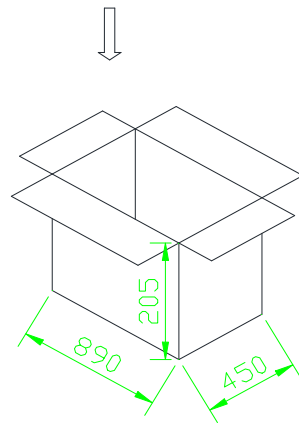

Big carton
890L*450W*205Hmm
(35.03"L*17.7"W*8.07"H)
50pcs LED Bulbs inside

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.