



### Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation.
- Low Power Consumption: Less than 12 Watts.
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Sturdy Construction:
  - PMMA and Aluminium alloy Lamp shell.
- High CRI: 70-85.
- Correlated Color Temperature: 2700-6500K.
- Operating temperature: -20°C~+60°C.
- 90-260V AC input.
- LED Type: 2835 LED.

### Benefits:

- Energy Cost Savings:
  - Over 60% Compared to Incandescent.
- Solid-State:
  - High-Shock & High-Vibration Resistant,
  - Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:
  - No Mercury, No Lead Content
- No Hazardous Emissions:
  - No UV or IR Radiation
- Constant Light Output:
  - Even Lighting, Non-Halation

### Applications:


- Mirror lighting
- Bathroom lighting
- Other Lighting

**Product Specifications:**

Lamp Shell	Aluminium
Input Voltage	90-260V AC
Wattage	12W
Power Factor	PF ≥ 0.5
Operating frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Net Weight per piece (Kg)	1.34KG
Certifications	RoHS Compliant

**Product Selection Guide:**

Part No.	Beam Angle	Total Lumens	CCT	Color	CRI
MF-WW12WC	120°	650±10%	2700-3500K	Warm White	≥70
MF-W12WC	120°	700±10%	5500-6500K	White	≥70

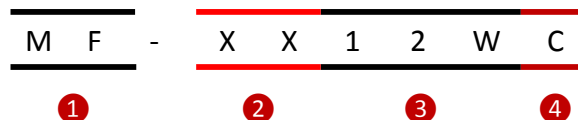

# LED Mirror Front Lamp Series



## Data Sheet

MF-XX12WC

AC90-260V, 12W

①	MF:	Product Type.
②	XX:	WW-Warm White W-White
③	12W:	The single LED power is 12W
④	C:	AC90-260V


### Product Dimensions:

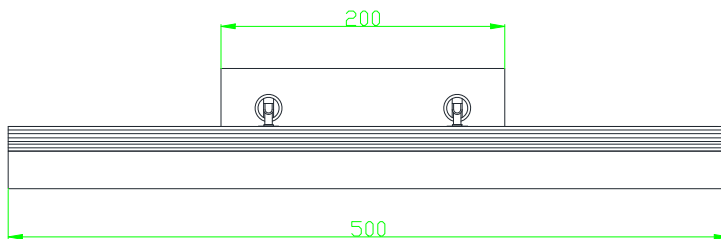

### Notes:

1. All dimensions unit in mm
2. Tolerances are  $\pm 0.5$ mm unless otherwise noted.

### Package Dimension:

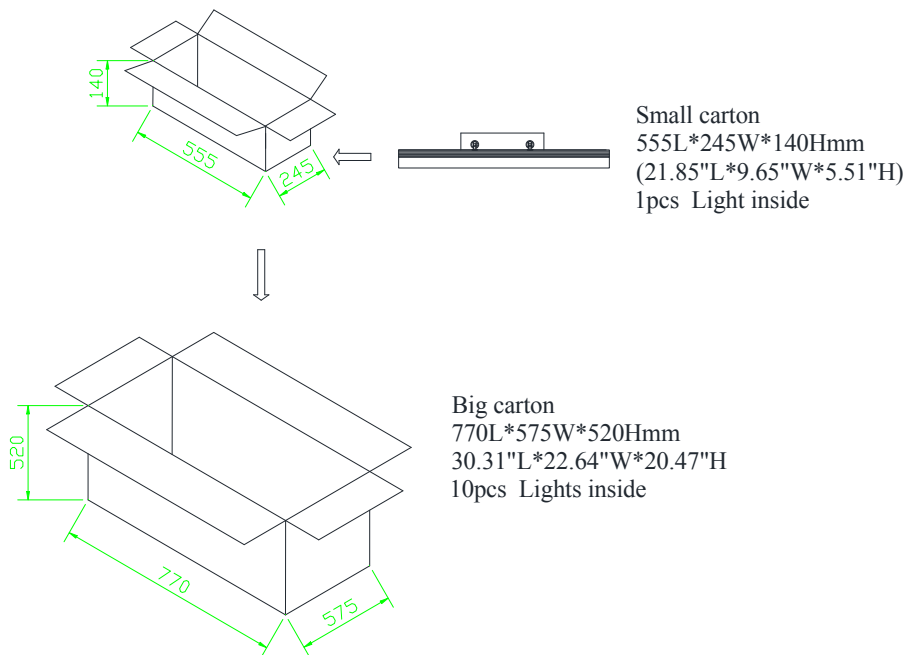

### Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

#### Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.