



Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation:
 - Using Existing G13 Fixture.
- Low Power Consumption: Less than 24 Watts.
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
 - Aluminium and PC Shell.
- High CRI: 70-85.
- Correlated Color Temperature: 2700-6500K.
- Operating temperature: -20°C~+60°C.
- 100-240V AC input.
- LED Type : 2835 LED .

Benefits:

- Energy Cost Savings:
 - Over 60% Compared to Incandescent.
- Solid-State:
 - High-Shock & High-Vibration Resistant,
 - Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:
 - No Mercury, No Lead Content
- No Hazardous Emissions:
 - No UV or IR Radiation
- Constant Light Output:
 - Even Lighting, Non-Halation

Applications:


- Conferences/meeting rooms/show rooms/ showcases Lighting
- Villa/Residential houses Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Factories/plants/warehouses/ offices Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium And PC
Input Voltage	100-240V AC
Wattage	24W
Power Factor	PF \geq 0.9
Operating frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Net Weight per piece (Kg)	0.45KG
Certifications	RoHS Compliant
Size	1512*32*29mm


Product Selection Guide:

Part No.	Beam Angle	Total Lumens	CCT	Color	CRI
T8-WW120C	120°	1900 \pm 10%	2700-3500K	Warm White	\geq 80
T8-NW120C	120°	2000 \pm 10%	4000-4500K	Neuter White	\geq 70
T8-W120C	120°	2200 \pm 10%	6000-6500K	White	\geq 70

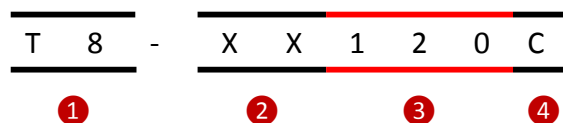

①	T8:	Product Type.
②	XX:	WW-Warm White NW- Neuter White W- White
③	120:	120 pcs of LEDs
④	C:	AC100-240V


Product Dimensions:

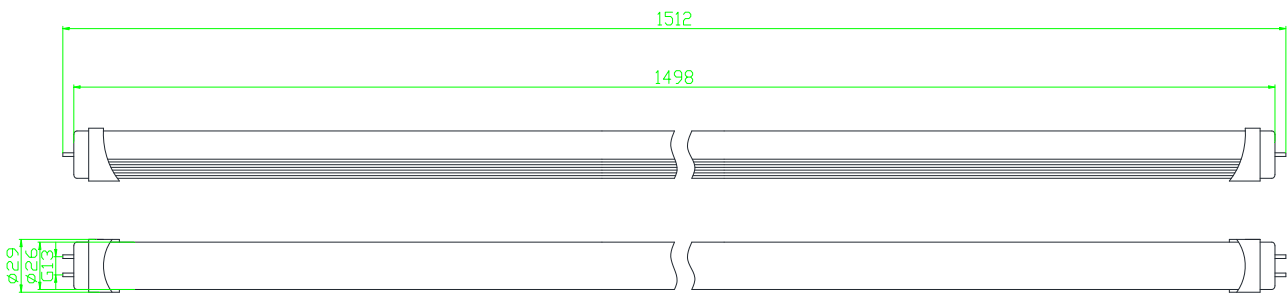

Notes:

1. All dimensions unit in mm
2. Tolerances are $\pm 0.5\text{mm}$ unless otherwise noted.

Package Dimension:

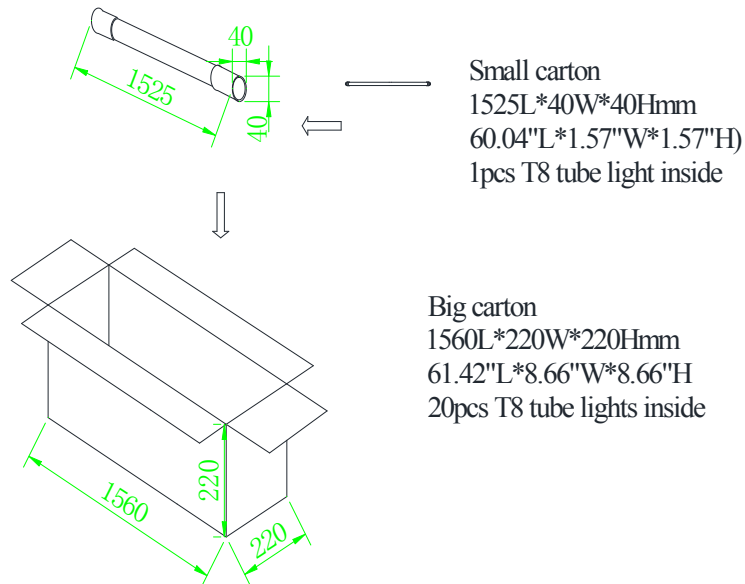

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

The maximum input current is measured at maximum load: 0.3A@ 100~240VAC

Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.